

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

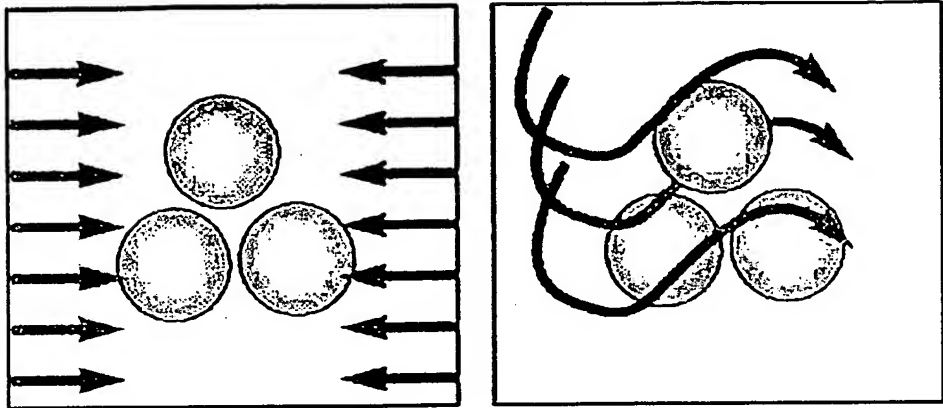


Figure 1. Line-of-sight radiative heating and convective heating.

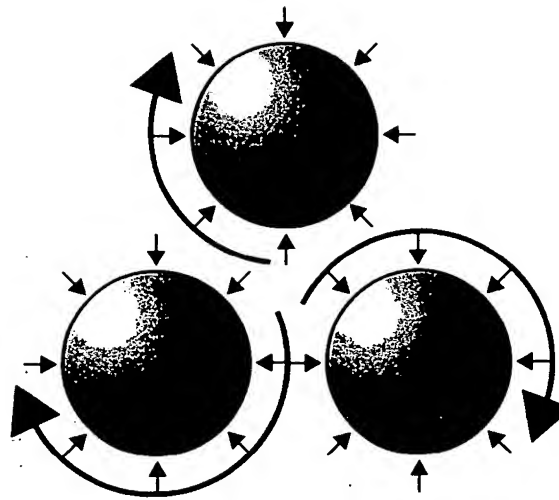


Figure 2. Extra heat deposition (i.e. over convection) by ionized gas.

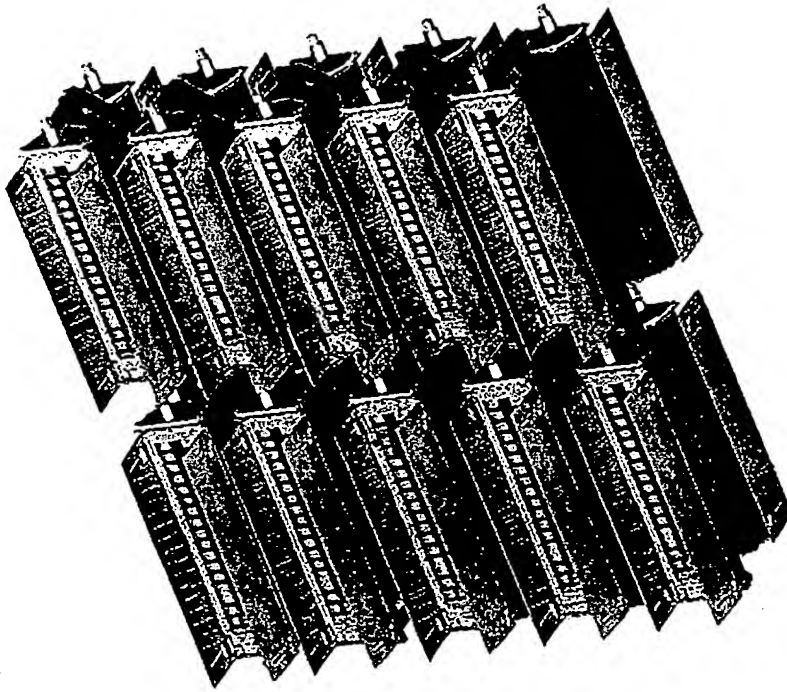


Figure 3. Flexible heating system in closed condition. Figures shows height adjustment, collapsible-frame, and IR lamp unit 2 kW short-wave.

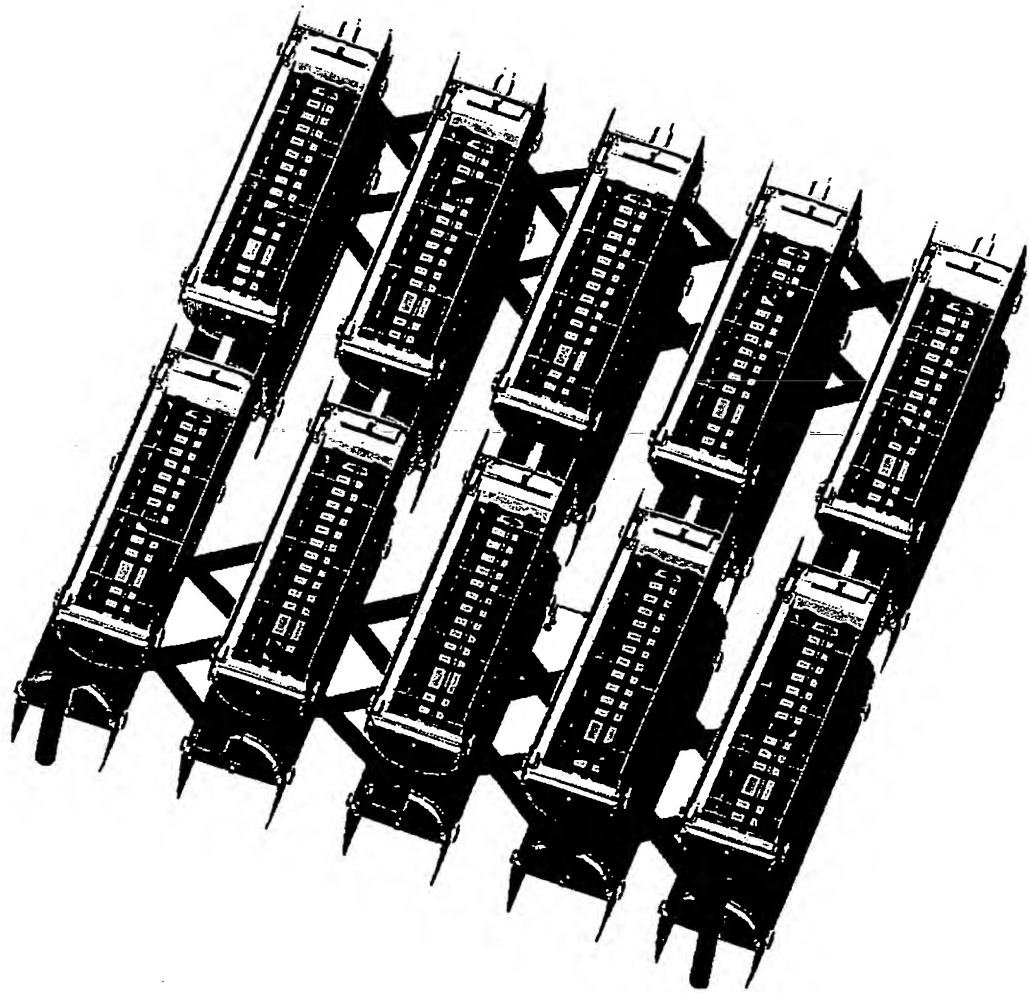


Figure 4. Flexible heating system in open condition. Note that both up and down heating are possible. Each module may turn 180 degrees and in the sideways direction and 360 degrees in its plane. The flexible mesh may contour around bends easily.

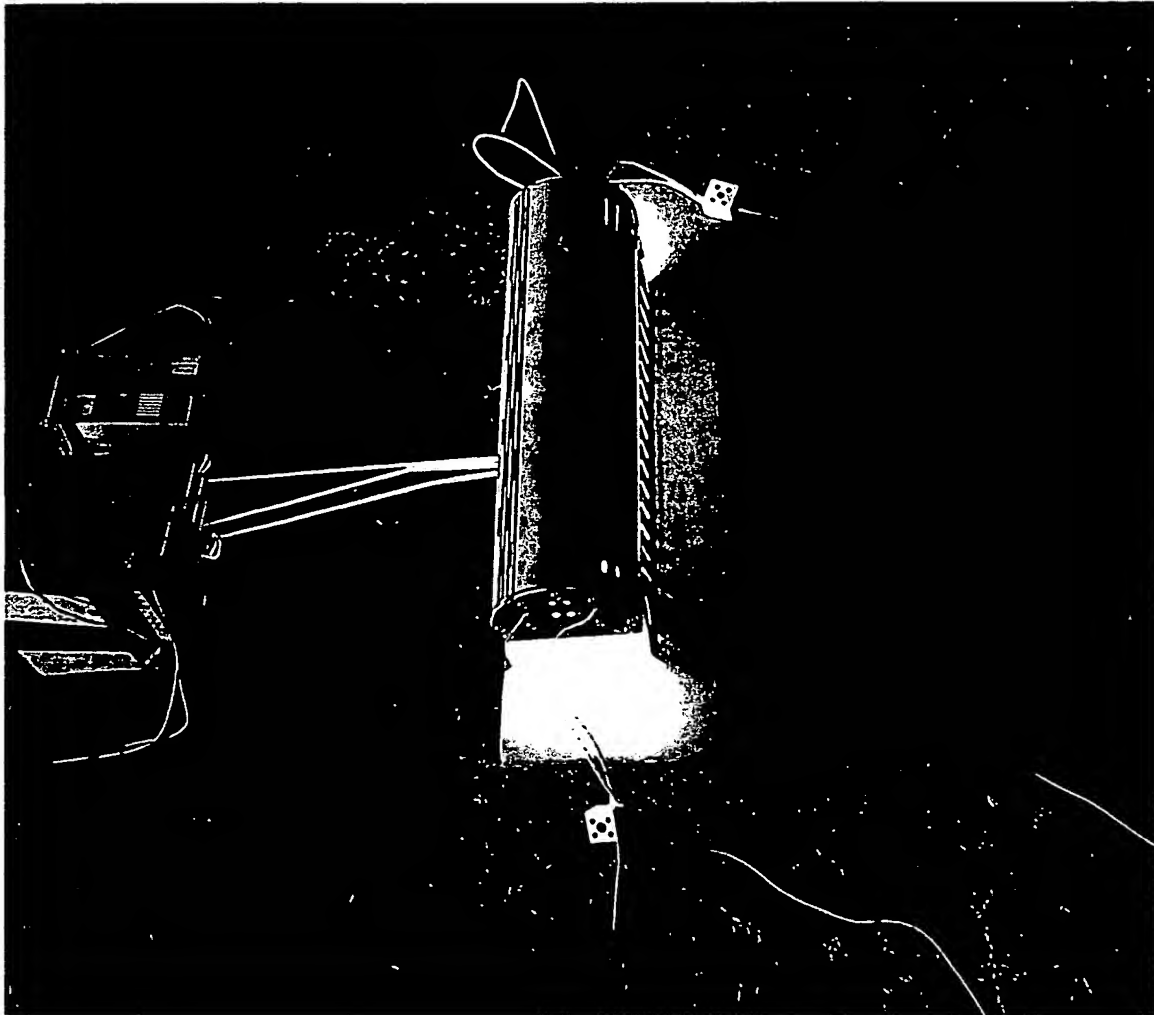


Figure 5. A photograph taken after swiveling the heater module. Note bright area extends considerably beyond the coverage area even though side flaps are used which inhibit direct radiation which could be harmful.

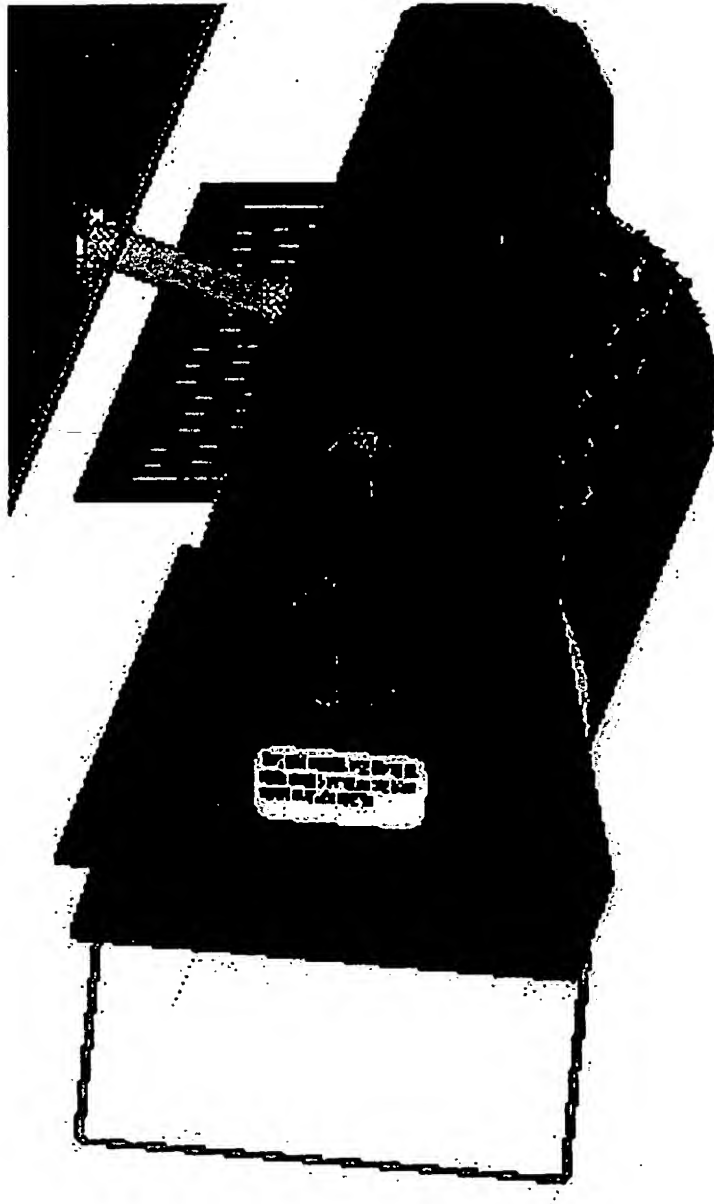


Figure 6. Note 90 degree swiveling action in a single module.